



# SURESEAL FLANGE LINERS SURESEAL PIPE SYSTEMS

web: [www.sureseal.com.au](http://www.sureseal.com.au) e-mail: [peter@sureseal.com.au](mailto:peter@sureseal.com.au)

tel: (08) 9312 1570 fax: (08) 9312 1748

Factory Unit 14  
16 Salpietro Street  
Bibra Lake, 6163  
Western Australia

ABN 69 805 629 300

Locally developed and manufactured, thermoplastic flange nozzle liner for Glassfibre Reinforced Plastic (G.R.P) applications in common sizes 25 N.B. To 150 N.B.

Homogenous injection moulded in Polypropylene and P.V.C as standard stock items, PVDF and HDPE are available on request

No thinning of material at internal radius of flared flange face

Improved gasket sealing by the incorporation of grooves on the flange face

No risk of weld failure on flared face and tube interface

Uniformly moulded with accurate tolerances


Chemical resistant

Ideal for butt welding to lined G.R.P pipe systems or hot gas welding to thermo plastic lined equipment

Suitable for use as ANSI B16.5 150 lbs and BS 4504 PN10 full face or stub flanges. Can be drilled to suite other flange tables if required



# TECHNICAL DATA

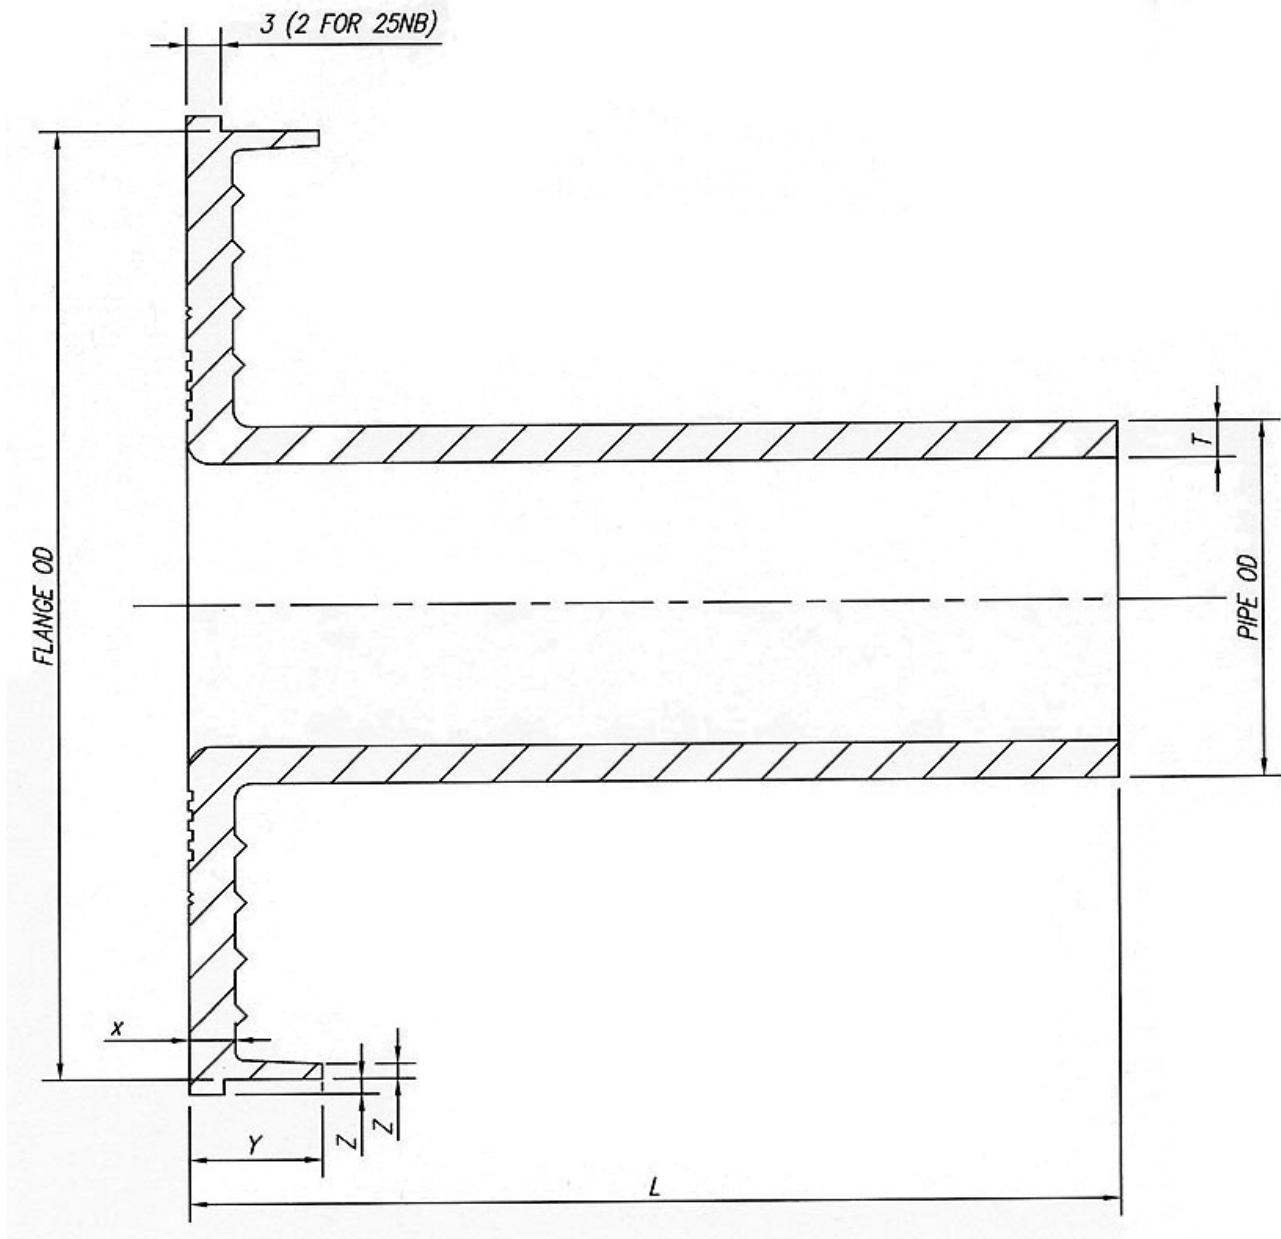

NB	PIPE OD	L	FLANGE OD	T	X	Y	Z
25	32	160	119	3	4	20	4
40	50	160	154	4	5	20	4
50	63	160	169	4	5	25	4
80	90	160	204	4	5	25	4
100	110	210	233	4	5	25	4
150	160	210	289	4.5	5	35	4